



Q-SUN solar

Qrystal **N10**

Mono-Crystalline
545~565W

0~+5W POWER TOLERANCE

- High efficiency N - type Double glass module
- Stronger properties, PID resistance, reduced hot spot loss
- Higher module power, lower BOS costs
- Harsh environmental adaptation
- Bifacial module, more power generation

15 years material warranty **15**

30 years power linear warranty **30**

120

HALF-CUT
CELLS

182
x210
mm

RECTANGULAR
CELLS

**A sound quality management
system and product certification**

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality management system

ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system




22.9%
MAXIMUM CONVERSION

0~+5W
POWER TOLERANCE


0.4%
0.4% PER YEAR OVER 30 YEARS

Half-Cut Module
LOWER TEMPERATURE COEFFICIENT

Mechanical Diagrams

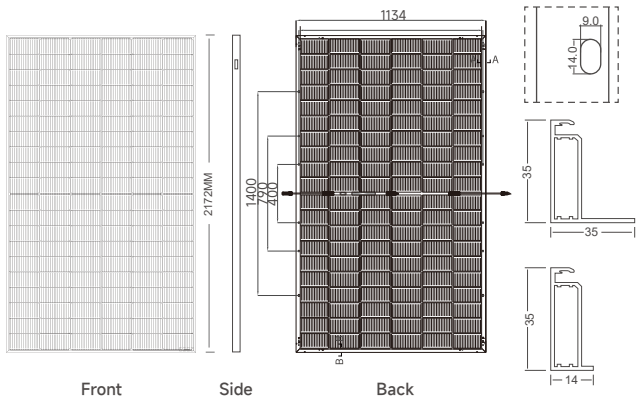

Length: ± 2 mm Width: ± 2 mm Thickness: ± 1 mm Hole pitch: ± 2 mm

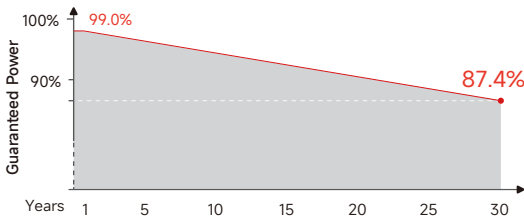


Packing Standard

Container capacity(40HQ)

Pallet size (mm) : 36pcs/pallet,20pallets/ctns, 720pcs/ctn

Curve Figure

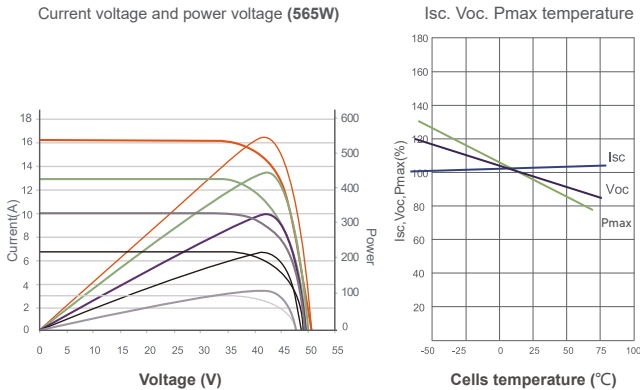

Specification

Cell Type	Mono Crystalline
No. of Cells	120 [2x(6x10)] pcs
Dimension	2172x1134x30mm
Weight	30.3kg
Front Glass	2.0mm
Back Glass	2.0mm
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

Electrical Parameters

Module Type	QN-545HT-2		QN-550HT-2		QN-555HT-2		QN-560HT-2		QN-565HT-2	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	545	412	550	416	555	420	560	423	565	427
Open Circuit Voltage (Voc)	43.37	41.20	43.61	41.43	43.85	41.65	44.08	41.88	44.32	42.11
Short Circuit Current (Isc)	15.91	12.72	15.96	12.77	16.02	12.82	16.08	12.86	16.14	12.91
Maximum Power Voltage (Vmp)	36.21	34.22	36.42	34.42	36.63	34.62	36.84	34.81	37.05	35.01
Maximum Power Current (Imp)	15.05	12.04	15.10	12.08	15.15	12.12	15.20	12.16	15.25	12.20
Module Efficiency - η_m (%)	22.1		22.3		22.5		22.7		22.9	

Load Capacity

Max Load Front	5400Pa
Max Load Back	2400Pa
Through Hail Testing	25mm Diameter, Impact Speed 23m/s

Temperature Coefficient (STC Test)

Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Pmax	-0.29%/°C

Operation Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+5W
Nominal Operating Cell Temperature (NOCT)	42 $\pm$ 2°C
Safety Class	class I
Refer.Bifacial Factor	75 $\pm$ 10%

STC: Irradiance:1000W/m² | Battery temperature: 25°C | Atmospheric=1.5

NOCT: Irradiance:800W/m² | Ambien temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/s

D5 Greenland Window Building
Nonghua Road
Yuhuatai District, Nanjing, China
www.q-sunsolar.com

