

Mercury Series

Mono-Crystalline
565~585W

0~+5W POWER TOLERANCE

- High efficiency N - type Double glass module
- Stronger properties, PID resistance, reduced hot spot loss
- Higher module power, lower BOS costs
- Harsh environmental adaptation
- Bifacial module, more power generation

15 years material warranty **15**

30 years power linear warranty **30**

132

HALF-CUT
CELLS

182
x199
mm

RECTANGULAR
CELLS

**A sound quality management
system and product certification**

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality management system


ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system



22.6%
MAXIMUM CONVERSION0~+5W
POWER TOLERANCE0.4%
0.4% PER YEAR OVER 30 YEARSHalf-Cut Module
LOWER TEMPERATURE COEFFICIENT

Mechanical Diagrams

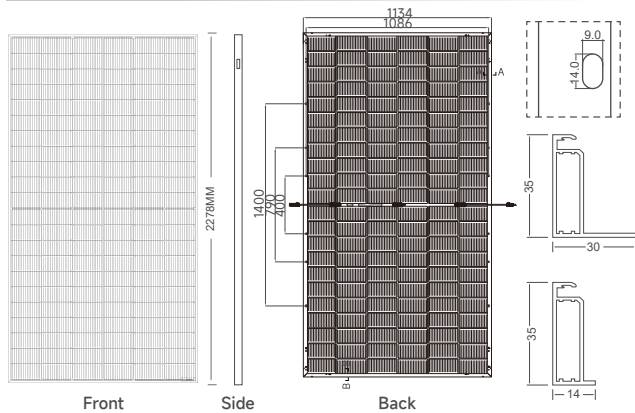Length: $\pm 2\text{mm}$ Width: $\pm 2\text{mm}$ Thickness: $\pm 1\text{mm}$ Hole pitch: $\pm 2\text{mm}$

Packing Standard

Container capacity(40HQ)

Pallet size (mm) : 32pcs/pallet,20pallets/ctns, 640pcs/ctn

Electrical Parameters At BNPI

Maximum Power (Pmax)	623	628	634	639	645
Open Circuit Voltage (Voc)	47.18	47.42	47.65	47.89	48.12
Short Circuit Current (Isc135)	16.71	16.78	16.84	16.90	16.97
Short Circuit Current (Isc300)	18.61	18.68	18.75	18.83	18.90
Maximum Power Voltage (Vmp)	39.59	39.80	40.01	40.22	40.43
Maximum Power Current (Imp)	15.73	15.79	15.84	15.90	15.95

Electrical Parameters

Module Type	QN-565HT-03		QN-570HT-03		QN-575HT-03		QN-580HT-03		QN-585HT-03	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	565	427	570	431	575	435	580	438	585	442
Open Circuit Voltage (Voc)	47.18	44.82	47.42	45.05	47.65	45.27	47.89	45.50	48.12	45.71
Short Circuit Current (Isc)	15.16	12.13	15.21	12.17	15.27	12.22	15.33	12.26	15.39	12.31
Maximum Power Voltage (Vmp)	39.59	37.41	39.80	37.61	40.01	37.81	40.22	38.01	40.43	38.21
Maximum Power Current (Imp)	14.27	11.42	14.32	11.46	14.37	11.50	14.42	11.54	14.47	11.58
Module Efficiency - η_m (%)	21.9		22.1		22.3		22.5		22.6	


Load Capacity

Max Load Front	5400Pa
Max Load Back	2400Pa
Through Hail Testing	25mm Diameter, Impact Speed 23m/s

Temperature Coefficient (STC Test)


Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Curve Figure

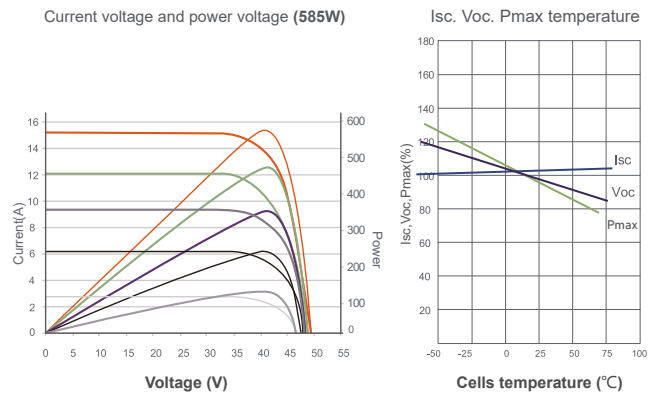

Specification

Cell Type	Mono Crystalline
No. of Cells	132 [2x(6x11)] pcs
Dimension	2278x1134x35mm
Weight	32.5kg
Front Glass	2.0mm
Back Glass	2.0mm
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

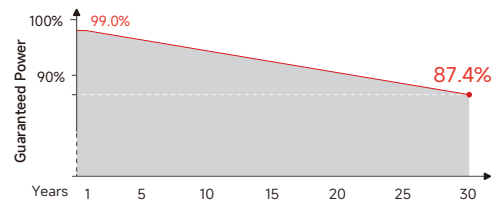

Operation Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+5W
Nominal Operating Cell Temperature (NOCT)	42 $\pm$ 2°C
Safety Class	Class II
Refer.Bifacial Factor	80 $\pm$ 10%

STC : Irradiance:1000W/m² | Battery temperature: 25°C | Atmospheric=1.5NOCT: Irradiance:800W/m² | Ambien temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/sBNPI: Rear Irradiance 135W/m² | Bifaciality coefficient 80% $\pm$ 5%D5 Greenland Window Building
Nonghua Road
Yuhuatai District, Nanjing, China
www.q-sunsolar.com

All data contained in this specification is subject to change without prior notice, and the final interpretation rights belong to Q-SUNSOLAR (202410V2)