

Mercury Series

Mono-Crystalline
600~620W

0~+5W POWER TOLERANCE

- High efficiency N - type Double glass module
- Stronger properties, PID resistance, reduced hot spot loss
- Higher module power, lower BOS costs
- Harsh environmental adaptation
- Bifacial module, more power generation

15 years material warranty **15**

30 years power linear warranty **30**

144

HALF-CUT
CELLS

182
x191.6
mm

RECTANGULAR
CELLS

**Comprehensive quality management system
and product certification**

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality management system


ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system



23.0%
MAXIMUM CONVERSION0~+5W
POWER TOLERANCE0.4%
0.4% PER YEAR OVER 30 YEARSHalf-Cut Module
LOWER TEMPERATURE COEFFICIENT

Mechanical Diagrams

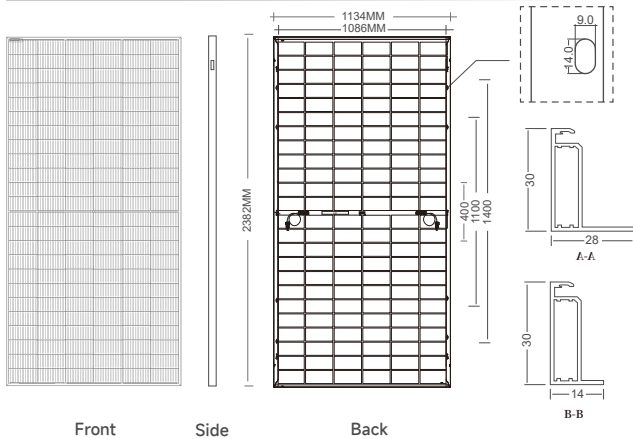

Front

Side

Back

Length: ± 2 mm Width: ± 2 mm Thickness: ± 1 mm Hole pitch: ± 2 mm

Packing Standard

Container capacity(40HQ)

Pallet size (mm) 37pcs/pallet, 20pallets/ctns, 740pcs/ctn

Electrical Parameters At BNPI

Maximum Power (Pmax)	662	667	673	678	681
Open Circuit Voltage (Voc)	51.49	51.71	51.93	52.15	52.37
Short Circuit Current (Isc135)	16.27	16.33	16.39	16.46	16.53
Maximum Power Voltage (Vmp)	43.45	43.65	43.85	44.05	44.25
Maximum Power Current (Imp)	15.23	15.28	15.34	15.39	15.44
Short Circuit Current (Isc300)	18.12	18.19	18.26	18.33	18.40

Electrical Parameters

Module Type	QN-600HT-04		QN-605HT-04		QN-610HT-04		QN-615HT-04		QN-620HT-04	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	600	454	605	457	610	461	615	465	620	469
Open Circuit Voltage (Voc)	51.49	48.91	51.71	49.12	51.93	49.33	52.15	49.55	52.27	49.76
Short Circuit Current (Isc)	14.75	11.80	14.81	11.85	14.87	11.89	14.93	11.94	14.99	11.99
Maximum Power Voltage (Vmp)	43.45	41.06	43.65	41.25	43.85	41.44	44.05	41.63	44.25	41.82
Maximum Power Current (Imp)	13.81	11.05	13.86	11.09	13.91	11.13	13.96	11.17	14.01	11.21
Module Efficiency - η_m (%)	22.2		22.4		22.6		22.8		23.0	


Load Capacity

Max Load Front	5400Pa
Max Load Back	2400Pa
Through Hail Testing	25mm Diameter, Impact Speed 23m/s

Temperature Coefficient (STC Test)


Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Pmax	-0.29%/°C

Curve Figure

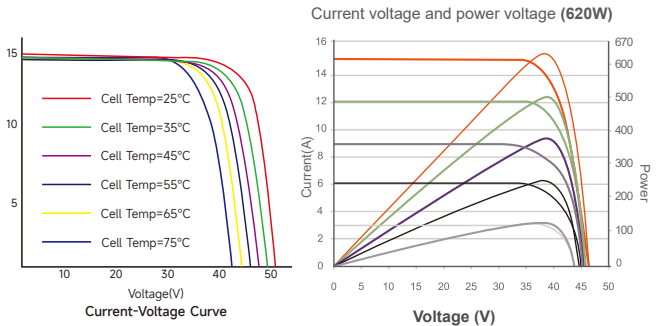

Specification

Cell Type	mono crystalline 16BB
No. of Cells	144 [2x(6x12)] pcs
Dimension	2382x1134x30mm
Weight	32.5kg
Front Glass	2.0 mm
Back Glass	2.0 mm
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

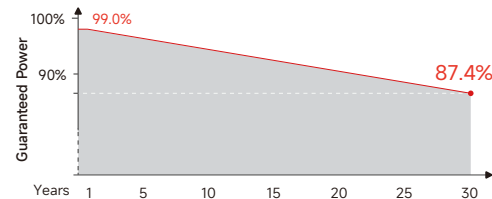

Operation Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0~+5W
Nominal Operating Cell Temperature (NOCT)	42 $\pm$ 2°C
Safety Class	Class II
Refer.Bifacial Factor	80 $\pm$ 10%

STC : Irradiance:1000W/m² | Battery temperature: 25°C | Atmospheric=1.5NOCT: Irradiance:800W/m² | Ambien temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/sBNPI: Rear Irradiance 135W/m² | Bifaciality coefficient 80% $\pm$ 5%D5 Greenland Window Building
Nonghua Road
Yuhuatai District, Nanjing, China
www.q-sunsolar.com