

Hima Series

Mono-Crystalline
570~590W

0~+5W POWER TOLERANCE

- High efficiency N - type Double glass Hima Module
- Stronger properties, PID resistance, reduced hot spot loss
- Front Load Capacity 10000 Pa; Back Load Capacity 8500 Pa
- Through Hail Testing: 45mm Diameter, Impact Speed 30.7m/s
- 400 thermal cycles from 85°C to -40°C
- Bifacial module, more power generation

15 years material warranty **15**

30 years power linear warranty **30**


144

HALF-CUT
CELLS



22.0%
MAXIMUM CONVERSION0~+5W
POWER TOLERANCE0.4%
0.4% PER YEAR OVER 30 YEARSHalf-Cut Module
LOWER TEMPERATURE COEFFICIENT

Mechanical Diagrams

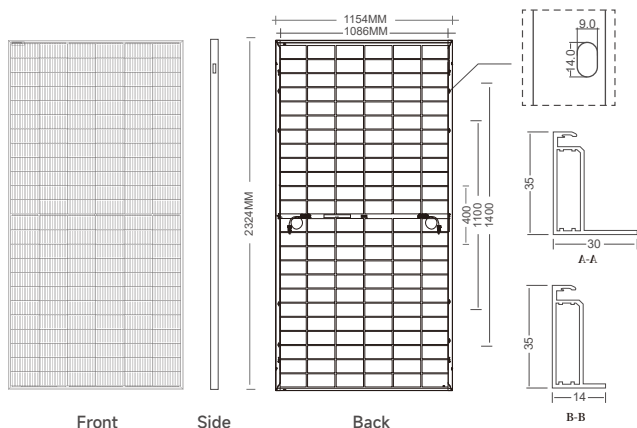Length: ± 2 mm Width: ± 2 mm Thickness: ± 1 mm Hole pitch: ± 2 mm

Packing Standard

Container capacity(40HQ)

Pallet size (mm) 31pcs/pallet, 16pallets/ctns, 496pcs/ctn

Electrical Parameters At BNPI

Maximum Power (Pmax)	628	634	639	645	650
Open Circuit Voltage (Voc)	51.22	51.47	51.70	51.93	52.16
Short Circuit Current (Isc135)	15.53	15.59	15.66	15.72	15.78
Maximum Power Voltage (Vmp)	43.21	43.43	43.64	43.85	44.06
Maximum Power Current (Imp)	14.54	14.60	14.65	14.71	14.76
Short Circuit Current (Isc300)	17.30	17.37	17.44	17.51	17.58

Electrical Parameters

Module Type	QN-570HTA-06		QN-575HTA-06		QN-580HTA-06		QN-585HTA-06		QN-590HTA-06	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	570	431	575	435	580	438	585	442	590	446
Open Circuit Voltage (Voc)	51.22	48.66	51.47	48.89	51.70	49.11	51.93	49.33	52.16	49.55
Short Circuit Current (Isc)	14.08	11.27	14.14	11.31	14.20	11.36	14.26	11.41	14.32	11.46
Maximum Power Voltage (Vmp)	43.21	40.83	43.43	41.04	43.64	41.24	43.85	41.44	44.06	41.64
Maximum Power Current (Imp)	13.19	10.55	13.24	10.59	13.29	10.63	13.34	10.67	13.39	10.71
Module Efficiency - η_m (%)	21.3		21.4		21.6		21.8		22.0	


Load Capacity

Max Load Front	10000Pa
Max Load Back	8500Pa
Through Hail Testing	45mm Diameter, Impact Speed 30.7m/s

Temperature Coefficient (STC Test)


Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Curve Figure

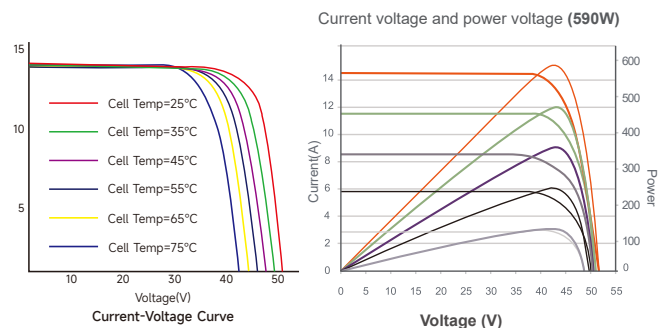

Specification

Cell Type	mono crystalline 16BB
No. of Cells	144 [2x(6x12)] pcs
Dimension	2324x1154x35mm
Weight	44kg
Front Glass	2.8 mm
Back Glass	2.8 mm
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

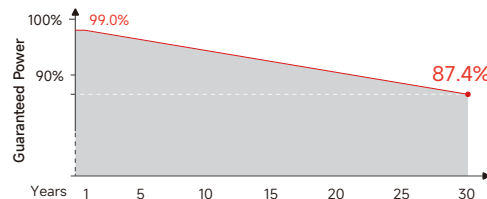

Operation Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+5W
Nominal Operating Cell Temperature (NOCT)	43 $\pm$ 2°C
Safety Class	Class I
Refer.Bifacial Factor	80 $\pm$ 10%

STC : Irradiance:1000W/m² | Battery temperature: 25°C | Atmospheric=1.5NOCT: Irradiance:800W/m² | Ambien temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/sBNPI: Rear Irradiance 135W/m² | Bifaciality coefficient 80% $\pm$ 5%D5 Greenland Window Building
Nonghua Road
Yuhuatai District, Nanjing, China
www.q-sunsolar.com